


THESE ENGINEERING DRAWINGS HAVE BEEN PREPARED BY SOUTHERN HYDRAULIC CYLINDER, INC. ("SHC") BASED ON PARTICULAR INFORMATION AND DESIGN SPECIFICATIONS PROVIDED BY THE CUSTOMER. SHC ASSUMES NO RESPONSIBILITY FOR SUCH PARTICULAR INFORMATION OR DESIGN SPECIFICATIONS PROVIDED AND ASSUMES NO RESPONSIBILITY FOR ANY SPECIFIC APPLICATION OF THE PRODUCT RESULTING FROM THE DESIGN SPECIFICATIONS. CUSTOMER SHALL INDEMNIFY SHC AGAINST ANY CLAIM BY ANY PARTY FOR DAMAGES BASED ON ANY ERROR, OMISSION OR FAULT IN THE PARTICULAR INFORMATION OR DESIGN SPECIFICATIONS PROVIDED BY THE CUSTOMER.

THIS PRINT CONTAINS CONFIDENTIAL INFORMATION AND IS THE PROPERTY OF SOUTHERN HYDRAULIC CYLINDER, INC. AND IS NOT TO BE COPIED OR REPRODUCED WITHOUT THE EXPRESSED CONSENT OF SOUTHERN HYDRAULIC CYLINDER, INC.

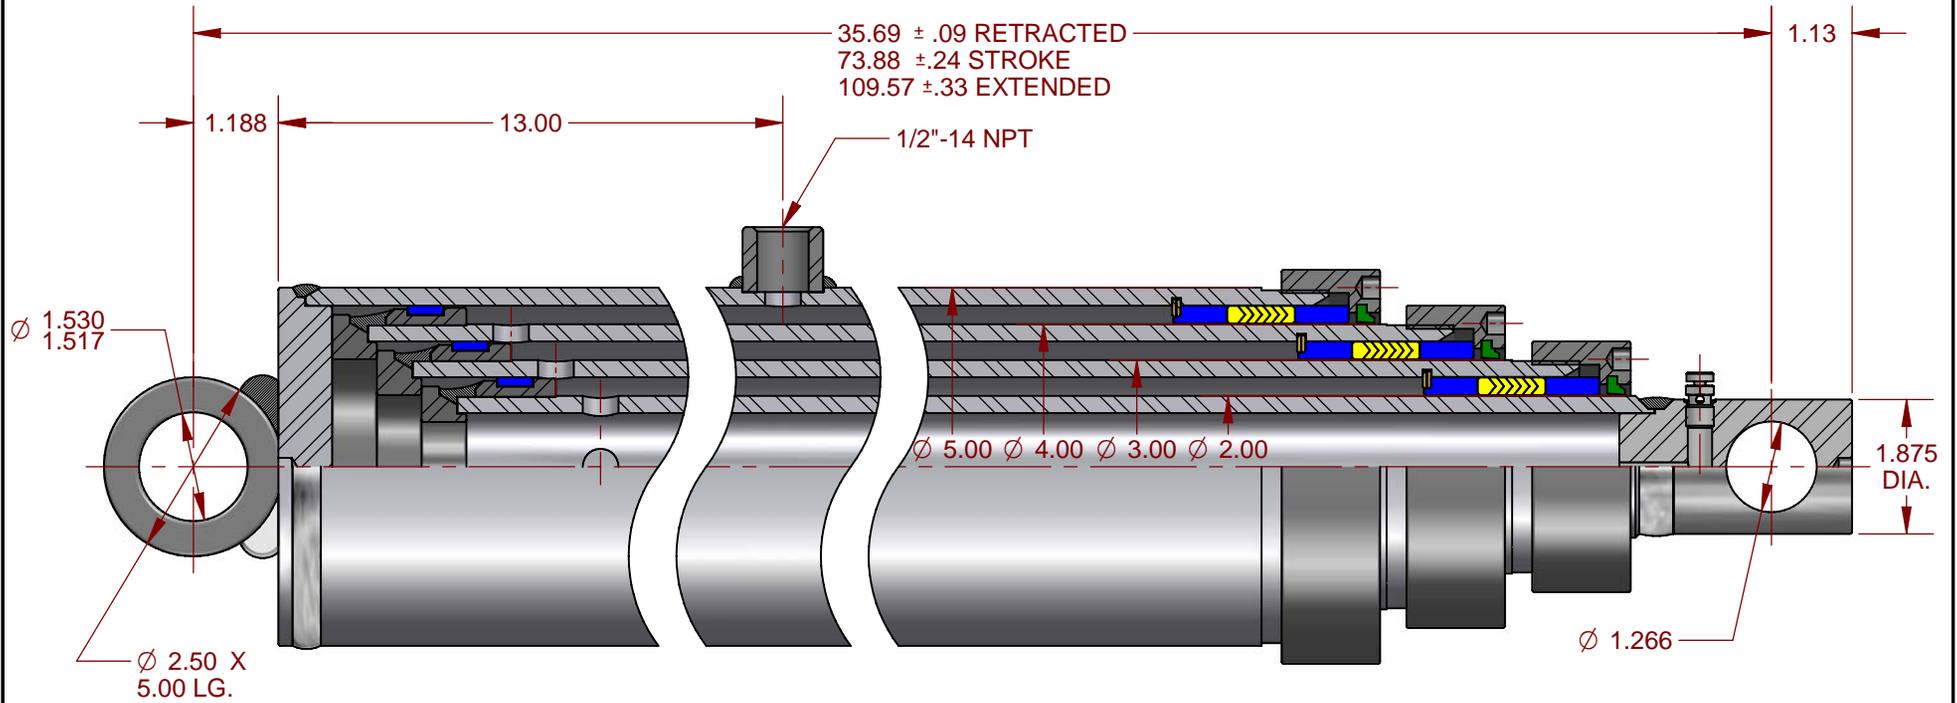

35.69 ± .09 RETRACTED  
73.88 ± .24 STROKE  
109.57 ± .33 EXTENDED

1/2"-14 NPT

Ø 1.530  
1.517


1.13

1.875  
DIA.

Ø 5.00 Ø 4.00 Ø 3.00 Ø 2.00

Ø 1.266

Ø 2.50 X  
5.00 LG.

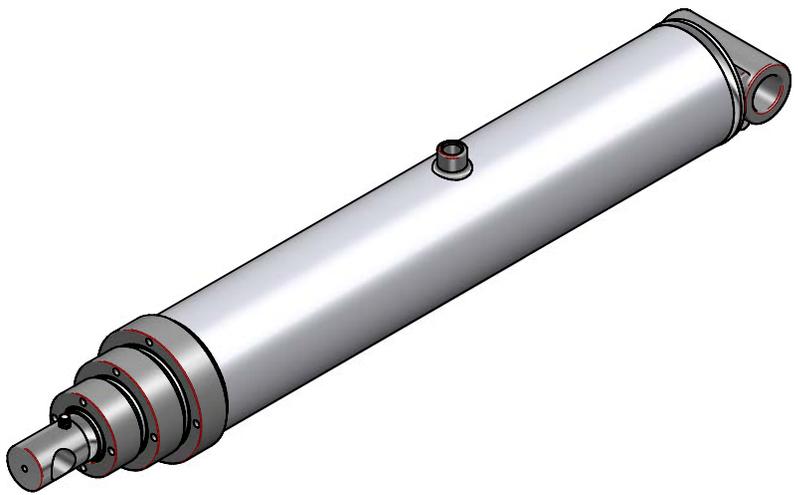

- NOTES:
1. SEAL KIT NUMBER: 43SA.
  2. MAX. OPERATING PRESSURE: 2500 PSI.
  3. PAINT NUMBER: UN1263 RED OXIDE PRIMER.
  4. OIL CAPACITY (GAL): 1.07 RETRACTED; 3.45 EXTENDED.
  5. CYLINDER WEIGHT (LBS): APPROX. 109

**SOUTHERN** HYDRAULIC CYLINDER, INC.

3020 Lee Highway Athens, Tennessee 37303

MACHINING TOLERANCES  
UNLESS OTHERWISE SPECIFIED  
ONE PLACE .X ± .1  
TWO PLACES .XX ± .03  
THREE PLACES .XXX ± .010  
FOUR PLACES .XXXX ± .0010  
ALL ANGLES R.25  
BREAK ALL SHARP EDGES .010 X 45°

DRAWN BY  
CHECKED  
APPROVED  
SCALE

DO NOT SCALE DRAWING FOR MACHINING DIMENSIONS

**TELESCOPIC  
CYLINDER ASSEMBLY  
4374CT**

|          |                |      |    |
|----------|----------------|------|----|
| CHANGE   | NO             | DATE | BY |
| CUSTOMER | STD TELESCOPIC |      |    |
| FILE     | SE             |      |    |

DRAWING NO.